


Panasonic

SINGLE-SPLIT PACKAGED AIR CONDITIONERS

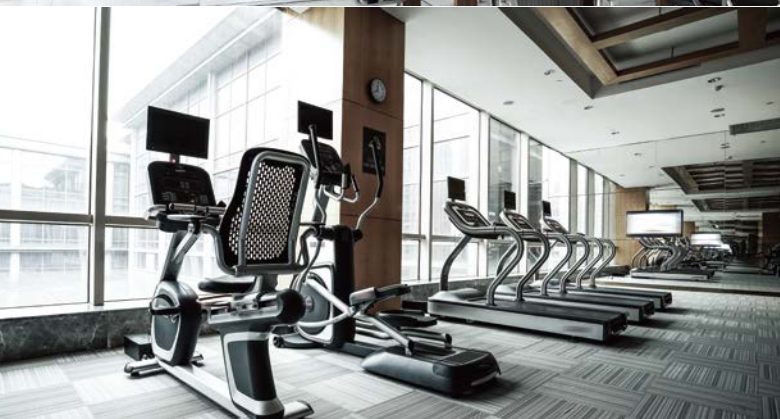

NON-INVERTER

nanoeX



QUALITY AIR FOR LIFE

Create an Environment that Benefits Your Business

Optimum Room Temperature, Better Work Performance

A considerable portion of our lives is spent at the workplace. So it goes without saying that a pleasant environment boosts both morale and productivity. The fact that people spend so much time in these places makes it all the more important to provide clean air and a comfortable temperature. To help you maintain that competitive edge, Panasonic supports your business by air conditioning the locations that are so essential to daily activities.



Feature

4-Way Cassette



Provides a neat fit in the ceiling to match modern decor, and uniform cooling throughout the room, plus easy installation.

CONTENTS

Introduction	2-3
Model Line-Up	4-5

Feature Highlight

4-Way Cassette	6-7
Air Purification	8-9
Flexible Installation	10-11
Remote Controller	12-13

Specifications

4-Way Cassette	14-15
Ceiling Mounted	16-17

Outdoor Units


Dimensions	18 -19
------------------	--------



Flexible Installation



nanoe™ X containing plenty of OH radicals inhibits bacteria and virus, deodorizes unpleasant odours and keeps room air clean and fresh.

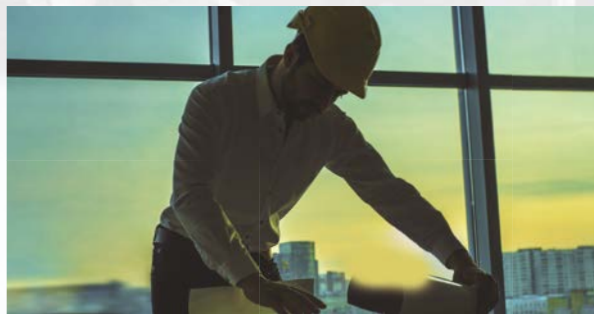

Panasonic outdoor units are built to be compact with versatile piping and draining methods as well as side-by-side installation capabilities.

MODEL LINE-UP

PANASONIC PACKAGED AIR CONDITIONERS ARE THE IDEAL AIR CONDITIONING SOLUTIONS FOR OFFICES, EDUCATIONAL INSTITUTIONS, RESTAURANTS AND RETAIL STORES.

Panasonic provides high performance air conditioning systems that extend from homes to businesses. These products comply with stringent environmental requirements and advanced building standards in the modern commercial environment.

Capacity (Btu/h)	18,500	22,500-23,000	25,000	27,000-28,000
4-WAY CASSETTE Optional  P.14-15	 S-18PU1H5	 S-22PU1H5	 S-25PU1H5	 S-28PU1H5
CEILING MOUNTED P.16-17		 S-22PT1H5		 S-28PT1H5
OUTDOOR UNITS P.18-19	 U-18PV1H5	 U-22PV1H5	 U-25PV1H5	 U-28PV1H5

4-WAY CASSETTE

















The 4-way direction airflow released through four vanes provides wide and even cooling.

CEILING MOUNTED



Providing outstanding energy-saving performance, comfort and long-distance air flow distribution, these units are perfect for retail stores and schools.

30,000	36,000-36,500	42,600	42,500-45,000	48,500	51,000
 S-30PU1H5		 S-40PU1H5	 S-45PU1H5	 S-50PU1H5	
	 S-35PT1H5		 S-45PT1H5		 S-55PT1H5
 U-30PV1H5  U-30PV1H8*	 U-35PV1H8*	 U-40PV1H8*	 U-45PV1H8*	 U-50PV1H8*	 U-55PV1H8*

*3-Phase

4-Way Cassette




Provides a neat fit in the ceiling to match modern decor, and uniform cooling throughout the room, plus easy installation.




Powerful Airflow

The Twisted 3D Blade Fan with compact design can increase airflow.


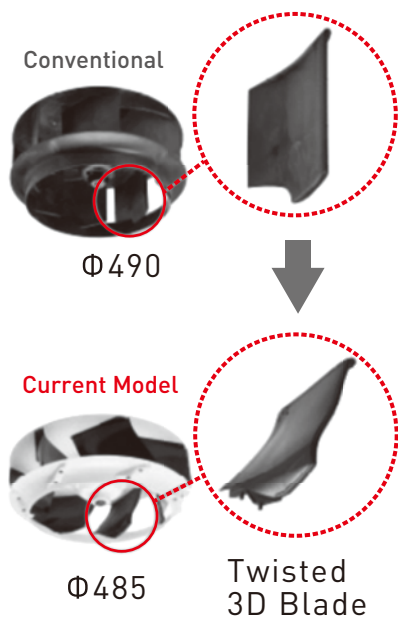


Wide Flap

Adding a sub flap and widening the main flap have reduced turbulence and increased airflow. Also, the wider angle jetting port allows the airflow to reach as far as five meters.


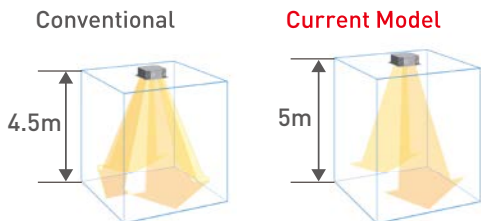


Conventional



Airflow turbulence is generated

Current Model




Airflow turbulence is reduced

360° Wide & Comfortable Airflow

Air coming out of the centre of the discharge outlets travels farther. Air is discharged across a wide area from the four sides of the unit. The curves on the room temperature distribution graph expand gently out through 360° in a circle centred on the indoor unit.

Ample airflow: 33 m³/min
Industry's leading in the 45PU class.

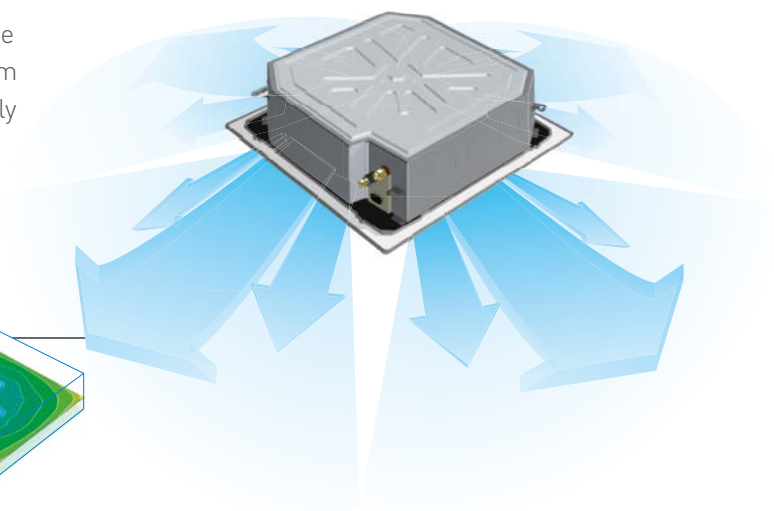


360° Wide

Temperature distribution by thermograph (cooling operation)



1m

Simulation conditions:
45PU 4-way ceiling-mounted cassette type in cooling mode/
Floor area of 225 m²/ Ceiling height of 3 m




Flat Horizontal Design

Panasonic believes that one of the most important elements of design is that it doesn't interfere with the overall room interior. The flat horizontal design of the 4-way Cassette achieves an elegant, yet simple form. This design allows it to protrude only 33.5 mm from the ceiling, to blend naturally into a variety of interiors, including offices and restaurants.



Easy Installation Design

With conventional models, it was difficult to use tools without damaging the interior. This has been redesigned for easier installation.

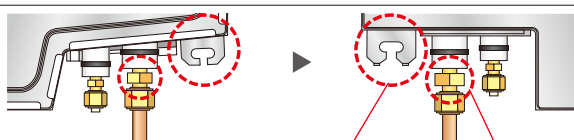

Previously, the eye bolts were hard to attach because of the bracket's shape

The nut has become larger, so it is easier to hold

By improving it to a V-shape, it is easier to install



nanoe™ is Panasonic's unique air purifying technology. Introduced in 2003, nanoe™ has brought comfortable, clean air to a wide variety of living environments. By conducting further research & development, Panasonic has now succeeded in developing nanoe™ X, with dramatically increased performance.

nanoe™ X Improves Air Quality

Panasonic's unique nanoe™ X has an outstanding effect on various air pollutants, including allergens, viruses and bacteria, as well as cigarette and other household odors. It takes reliable air purification performance another step forward.



Deodorizes unpleasant odors*1 *2 *3



nanoe™ X works on the substances responsible for odors to deodorize them.

Inhibits bacteria and virus*4 *5 *6 *7 *8



nanoe™ X suppresses airborne particles including bacteria, viruses and mould.

*1 Adhering odor of cigarette [Effectiveness]: Decrease by 1.7 level [Testing Institute]: Gunma Research Center [Test Report No]: No. 27055 [Result]: Decrease in odor intensity by 0.7 level after 2 hour of operation.

*2 Floating odor of cigarette [Effectiveness]: Decrease by 0.8level [Test Lab Size]:136.5m3 [Testing Institute]: Panasonic Corporation Product Analysis Center [Test Report No]: 4AA33-170117-A01 [Result]: Decrease in odor intensity by 0.8 level after 2 hour of operation.

*3 Adhering odor of Meat Grilling [Effectiveness]: Decrease by 0.9 level [Test Lab Size]:67.7m3 [Testing Institute]: Panasonic Corporation Product Analysis Center [Test Report No]: 4AA33-170203-A03 [Result]: Decrease in odor intensity by 0.9 level after 2 hour of operation.

*4 Mould [Effectiveness]: Inhibit Mould Growth [Testing Institute]: Japan Food Research Laboratories [Test Report No]: 13044083002-01 [Result]: The growth of the subject was inhibited after 8-hour nanoe™ operation.

*5 Bacteria [Effectiveness]: 99% [Testing Institute]: Kitasato Research Center for Environmental Science [Test Report No]: KRCEs-Env. Test Report 24_0301_1 [Result]: 99% of deactivation after 4-hour nanoe™ operation.

*6 Bacteria [Effectiveness]: 99% [Testing Institute]: Japan Food Research Laboratories [Test Report No]: 13044083002-01 [Result]: The growth of the subject was inhibited after 8-hour nanoe™ operation.

*7 Viruses [Effectiveness]: 99% [Testing Institute]: Kitasato Research Center for Environmental Science [Test Report No]: KRCEs-Env. Test Report 24_0300_1 [Result]: 99% of deactivation after 6-hour nanoe™ operation.


*8 Viruses [Effectiveness]: 99% [Testing Institute]: Japan Food Research Laboratories [Test Report No]: 13001265005-01 [Result]: 99% of deactivation after 8-hour nanoe™ operation.

nanoe™ X Mechanism

Amount of OH radicals increases without increasing amount of ozone, leading to improved effectiveness!


Generation Mechanism

nanoe™ X is generated from moisture in the air

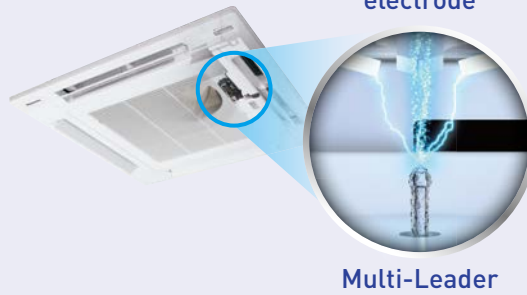

Structure


OH radical

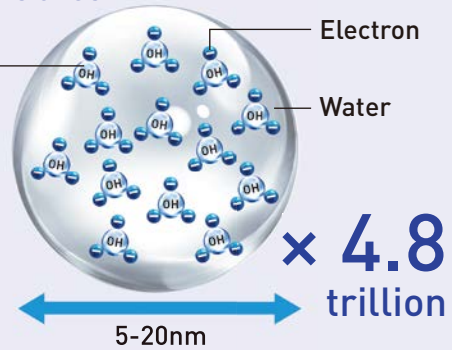

How to Deodorize Odor*¹ *² *³



How to Inhibit Bacteria, Virus and Mold*⁴ *⁵ *⁶ *⁷ *⁸

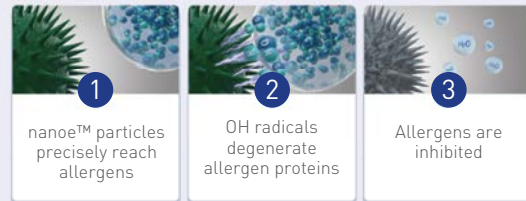


Also Cleans the Air When Not Air Conditioning

You can also use nanoe™ X in Fan mode when you're not cooling or heating the room. For example, you can use nanoe™ X to effectively suppress bacteria and odors without using excessive electricity when the office is empty or after business hours in a restaurant.



AC Mode + nanoe™ X



nanoe™ X purifies the room while maintaining the comfort temperature when people are in presence.

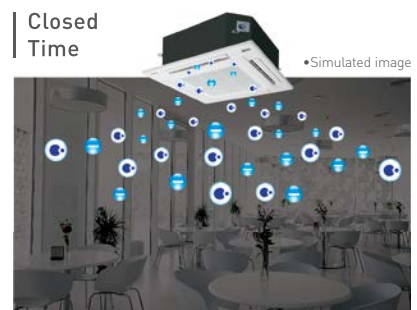

FAN Mode + nanoe™ X

After closing shops and facilities, nanoe™ X can perform air purification while they are not in use.

Case Examples of nanoe™




Flexible Installation



Space Saving Outdoor Unit

Panasonic's ingeniously designed outdoor units are compact in size to fit into any space and layout. Its smaller size makes it easy to install even in limited spaces. Flexibility in piping allows more freedom in installation leading to a reduced installation costs.


Can be installed in the limited space

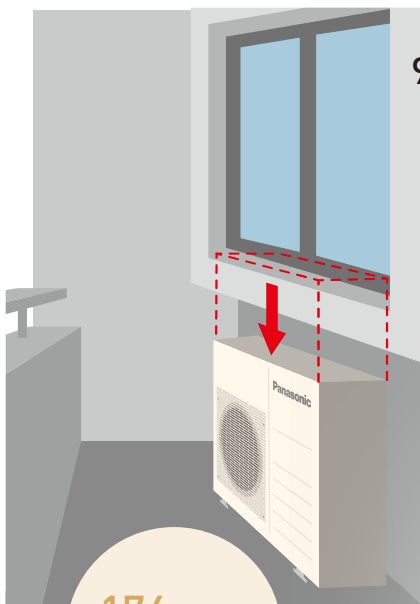

174 mm Shorter

H1170 × W900 × D320

174 mm Shorter

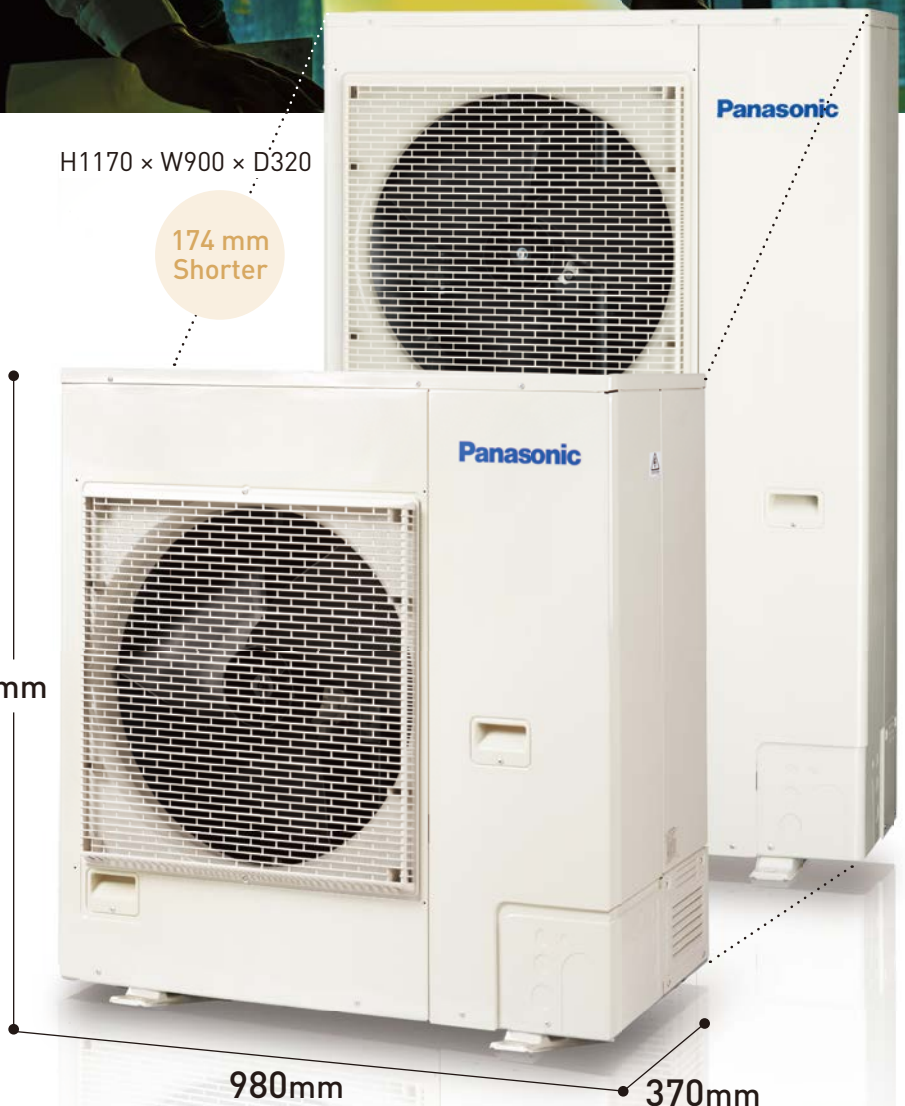


U-35PV1H8
U-40PV1H8
U-45PV1H8
U-50PV1H8

High Efficiency


The performance of our previous 2-fan models is now achieved by 1-fan models. The Coefficient of Performance has been greatly improved to reduce power consumption.

(*For 4-Way Cassette.

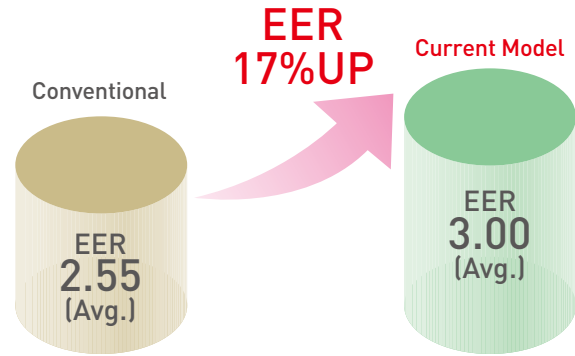

Long Piping

Piping can be extended up to 30m without additional gas charging, and up to 50m with additional gas charging. By giving you more flexibility in positioning the outdoor unit, this gives you a wider range of installation options.

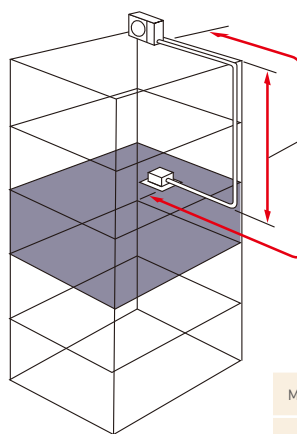

Max.^(*) 50m Pipe length

Max.^(*) 30m Height difference

(*Supports for
U-35PV1H8
U-40PV1H8
U-45PV1H8
U-50PV1H8
U-55PV1H8

Refrigerant Charge less Up to 30m


No additional gas charging is needed up to 30m. Installation is easy and hassle-free.

BTU	18.5-25k	28-30k	36-54k
Max. Pipe Length	30 m	45 m	50 m
Max. Chargeless Length #	7.5 m	7.5 m	30 m
Max. Height Difference	20 m	25 m	30 m

Additional gas is required when pipe length is extended.

High Durability Outdoor Unit

Corrosion-resistance treated for high resistance to rust and salty air to assure long-lasting performance.

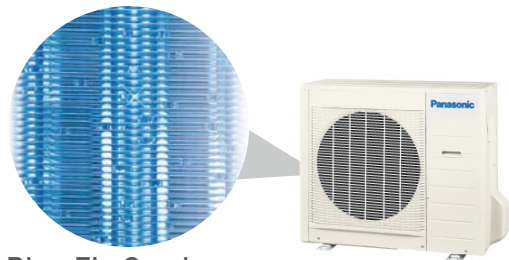


Blue Fin Condenser

Flexible 4-way Piping

Piping can be routed in any of four directions.

Flexible 4-Way piping

Supports for
U-35PV1H8
U-40PV1H8
U-45PV1H8
U-50PV1H8
U-55PV1H8



Easy Installation & Service Maintenance

The PCB inside the outdoor unit have been removed. It's easy installation and service maintenance.

Supports for
U-18PV1H5 U-28PV1H5
U-22PV1H5 U-30PV1H5
U-25PV1H5 U-30PV1H8



Remote Controller

Precise Control, Easy Comfort

Panasonic Packaged Series Remote Controllers are designed with user comfort in mind. Multiple settings are available so airflow and air quality can be regulated according to preferences. Users can also opt for a wired remote controller equipped with high-performance timer.



Wired Remote Controller

CZ-RD513C

(For 4-Way Cassette Type and Ceiling Mounted Type)



Wireless Remote Controller / Receiver

4-Way Cassette Type (Optional)



CZ-RL013U


Ceiling Mounted Type (Optional)



CZ-RL013T


Settings can be regulated with 3 control options:

Group Control by a single remote controller

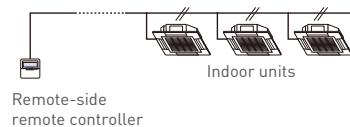


- All indoor units operate in the same mode.

Separate Control by Twin Remote Controllers

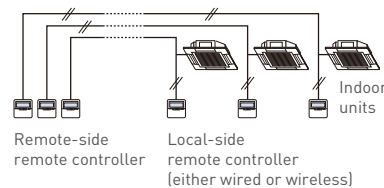

- Each indoor unit can be operated by either of the two remote controllers.
- Apart from the timer setting time, the displays for the two remote controllers are identical.
- The last button pressed has priority (The main or slave attribute is set with the remote controller).

Common Control by Both Wired and Wireless Remote Controllers

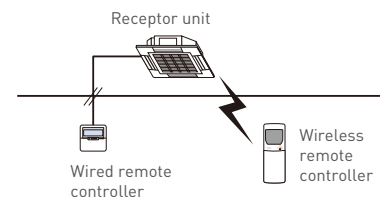

- The last button pressed has priority (using either wired or wireless remote controllers).


Weekly Timer (For All Models)

- 1.Timer can be set for each day of the week.
- 2.Can be pre-set with: •Max. 6 settings/day •42 settings/week.
- 3.The temperature can also be programmed for optimal comfort.

Pre-sets for different conditions

Businesses with regular off days	Businesses with varying visitor flows at different timings	Can be set to switch off automatically														
Example: Saturday afternoon – CLOSED Sunday – CLOSED	Example: Lunchtime - More visitors, lower temperature	Example: Avoid power wastage even if users forget to turn it off (weekdays)														
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Mon-Fri</td><td>On 9:00, Off 18:00</td></tr> <tr><td>Sat</td><td>On 9:00, Off 12:00</td></tr> <tr><td>Sun</td><td>Not set</td></tr> </table>	Mon-Fri	On 9:00, Off 18:00	Sat	On 9:00, Off 12:00	Sun	Not set	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td colspan="2">Daily Settings</td></tr> <tr><td>On 12:00</td><td>23°C</td></tr> <tr><td>On 14:00</td><td>28°C</td></tr> </table>	Daily Settings		On 12:00	23°C	On 14:00	28°C	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Mon-Fri</td><td>Off 20:00</td></tr> </table>	Mon-Fri	Off 20:00
Mon-Fri	On 9:00, Off 18:00															
Sat	On 9:00, Off 12:00															
Sun	Not set															
Daily Settings																
On 12:00	23°C															
On 14:00	28°C															
Mon-Fri	Off 20:00															
▶ Timer settings can be different every day of the week.	▶ Timing & temperature can be set simultaneously.	▶ Timer can be set for simple shut-off operation.														

Setting the timer




*Simple Timer Mode
Using the 24-Hour ON/OFF timer, ON/OFF operations can be set at the same time daily.

Odour Wash (For All Models)

Reduces unpleasant odours caused by the air conditioner's heat exchanger.

Odour Removing ONE PUSH

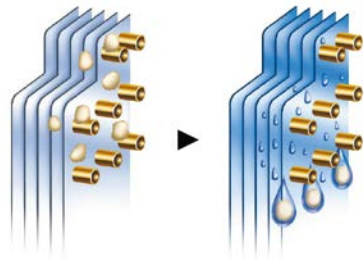


When air from the outlet smells musty, moisture in the heat exchanger washes away odours.

Can be operated with the wireless remote controller.

Economy Mode (For All Models)

Saves up to 20%* energy. The air conditioner determines the stable condition and moderately shifts the set temperature in 0.5-degree steps to regulate the energy-saving operation (max. 2 degrees).

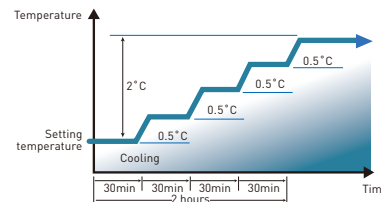


*During operating in the cooling mode at the remote control set temperature of 25 under the cooling standard temperature conditions.

Can be operated with the wireless remote controller.

Ventilation (For All Models)

When an external device such as a ventilator is connected to the indoor unit, the ventilator's ON/OFF operations can be controlled by the wired remote controller. You can select from either link-ventilation or independent-ventilation.

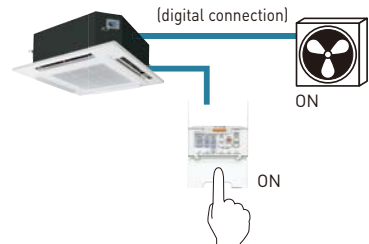


Ventilators are not included in the product line-up. OPTIONAL : Printed circuit board (Interface Adapter for External Signals CZ-TA31P*) is needed.

*Printed Circuit Board CZ-TA31P

- By connecting to the indoor unit, a separately sold ventilator can be controlled.
- Remote operation control of the indoor unit is enabled (ON/OFF control).
- The condition of the indoor unit (malfunctions, operating status) can be output externally.
- Control in linkage to a total heat exchanger or similar devices is possible.

Multi Comfort Air Control (For Cassette Models)

Current control technology gives users a wide selection of more specific airflow angles. Choose from the 3-Pattern Auto Swings to avoid direct exposure to cool air (total 50-degree swing width).




Central Control Adapter

Using RAC Interface Adapter along with the existing VRF units, a centralized control system is possible. Temperature management can be achieved by expanding low-to-mid sizes together.



CZ-CAPRA1+CZ-CCERA1
H120×W70×D32,5mm

Even buildings with additional air conditioning systems can be central controlled

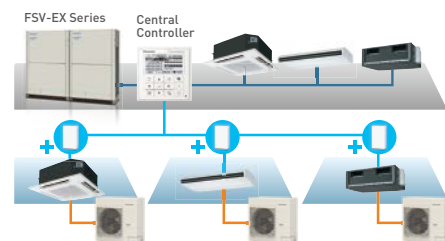

4-Way Cassette

Model No.

S-18PU1H5 S-30PU1H5
 S-22PU1H5 S-40PU1H5
 S-25PU1H5 S-45PU1H5
 S-28PU1H5 S-50PU1H5



TECHNICAL FOCUS

- Compact design
- Low sound levels
- DC fan motor for increased efficiency
- Powerful drain pump gives 850 mm lift
- Lightweight design
- Optional nanoe™ X (CZ-CNEXU1)



Accessories

Panel



CZ-KPU3H

Selectable Remote Controller



CZ-RD513C

CZ-RL013U

Optional nanoe™ X Kit



CZ-CNEXU1

Corner Panel




CZ-KNELU1

Capacity (Btu/h)		18,500	23,000	25,000
Power Source	V/Phase Hz			220 V, 1Ø Phase - 50 Hz
Indoor		S-18PU1H5	S-22PU1H5	S-25PU1H5
Outdoor		U-18PV1H5	U-22PV1H5	U-25PV1H5
Panel		CZ-KPU3H	CZ-KPU3H	CZ-KPU3H
Cooling Capacity: Rated	kW	5.42	6.74	7.33
	Btu/h	18,500	23,000	25,000
Current	A	7.8	9.5	10.3
Power Input: Rated	kW	1.69	2.05	2.22
EER	W/W	3.2	3.29	3.30
	Btu/hW	10.91	11.22	11.25
Indoor Unit				
Air Volume	m ³ /min	24.0	25.0	25.0
Sound Pressure Level (Hi/Lo)	dB (A)	41 / 32	41 / 32	41 / 32
Sound Power Level (Hi/Lo)	dB	56 / 47	56 / 47	56 / 47
Dimension	Indoor (H×W×D)	mm	256 × 840 × 840	256 × 840 × 840
	Panel (H×W×D)	mm	33.5 × 950 × 950	33.5 × 950 × 950
Net Weight	Indoor	kg	19	20
	Panel	kg	5	5
Outdoor Unit				
Sound Pressure Level	dB (A)	52	52	52
Sound Power Level	dB	68	68	68
Dimension	Outdoor (H×W×D)	mm	695 × 875 × 320	695 × 875 × 320
Net Weight		kg	44	55
Piping Connection	Gas Pipe	mm (inch)	12.70 (1/2")	15.88 (5/8")
	Liquid Pipe	mm (inch)	6.35 (1/4")	9.52 (3/8")
Pipe Length	Min-Max	m	7.5 - 30	7.5 - 30
Elevation Difference		m	20	20
Maximum Chargeless Length	Max	m	7.5	7.5
Additional Gas		g/m	20	25
Operating Range, Outdoor	Min-Max	°C	16 - 43	16 - 43

Dimensions

A (S-18PU1H5 / S-22PU1H5 / S-25PU1H5 / S-28PU1H5 / S-30PU1H5)

B (S-40PU1H5/ S-45PU1H5 / S-50PU1H5)

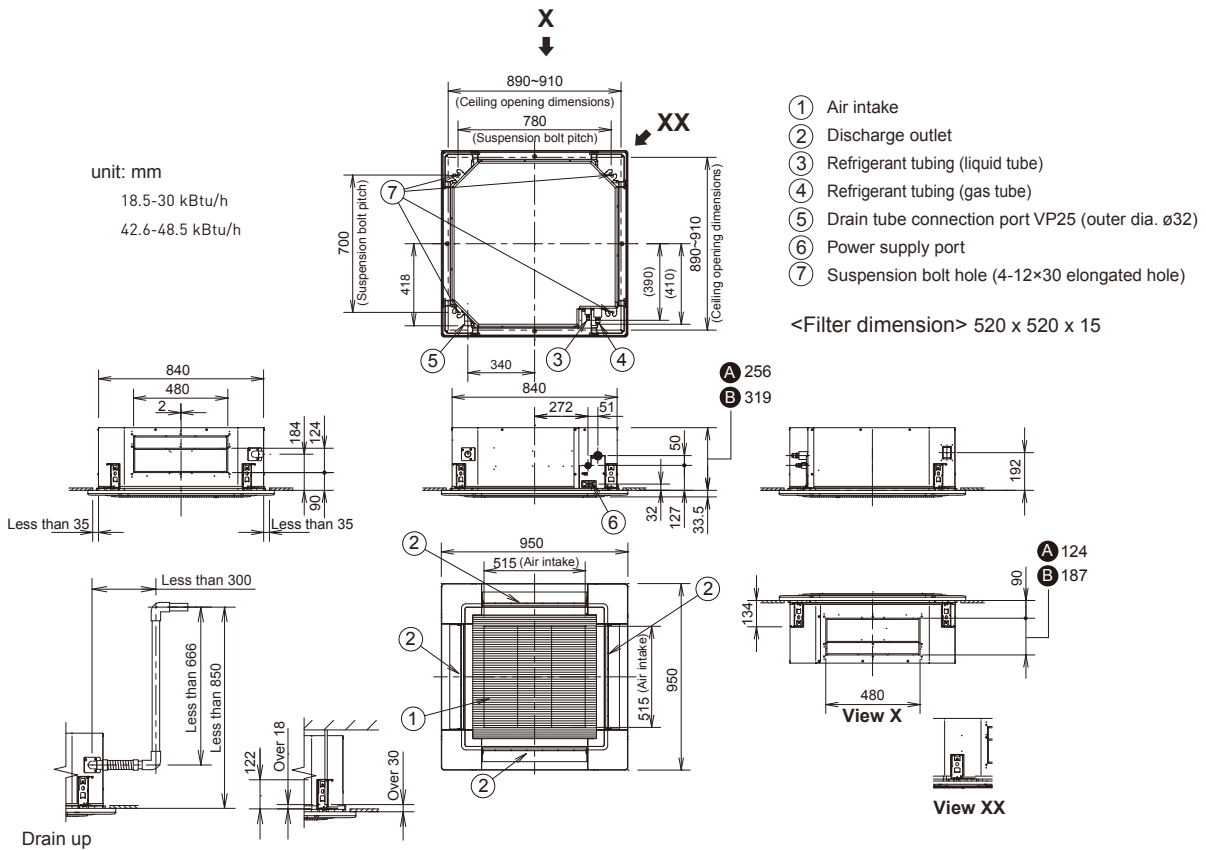

* Adjust the suspension bolt length so that the gap from the lower ceiling surface becomes 30 mm or more (18 mm or more from the lower surface of the body) as shown in the figure. When the suspension bolt length is long, it hits the ceiling panel and installation is not possible.

28,000	30,000	30,000	42,600	45,000	48,500
380 V, 3Ø Phase - 50 Hz					
S-28PU1H5	S-30PU1H5	S-30PU1H5	S-40PU1H5	S-45PU1H5	S-50PU1H5
U-28PV1H5	U-30PV1H5	U-30PV1H8	U-40PV1H8	U-45PV1H8	U-50PV1H8
CZ-KPU3H	CZ-KPU3H	CZ-KPU3H	CZ-KPU3H	CZ-KPU3H	CZ-KPU3H
8.21	8.79	8.79	12.49	13.19	14.22
28,000	30,000	30,000	42,600	45,000	48,500
13.2	13.6	5.2	7.0	7.5	8.6
2.84	2.93	2.93	4.07	4.37	4.90
2.89	3.00	3.00	3.07	3.02	2.90
9.85	10.23	10.23	10.47	10.30	9.89
25.0	25.0	25.0	33.0	33.0	33.0
41 / 33	41 / 33	41 / 33	45 / 37	45 / 37	46 / 41
56 / 48	56 / 48	56 / 48	60 / 52	60 / 52	61 / 56
256 × 840 × 840	256 × 840 × 840	256 × 840 × 840	319 × 840 × 840	319 × 840 × 840	319 × 840 × 840
33.5 × 950 × 950	33.5 × 950 × 950	33.5 × 950 × 950	33.5 × 950 × 950	33.5 × 950 × 950	33.5 × 950 × 950
20	20	20	22	22	22
5	5	5	5	5	5
56	56	57	56	56	56
71	71	71	70	70	70
695 × 875 × 320	695 × 875 × 320	750 × 875 × 345	996 × 980 × 370	996 × 980 × 370	996 × 980 × 370
57	57	58	86	86	90
15.88 [5/8"]	15.88 [5/8"]	15.88 [5/8"]	15.88 [5/8"]	15.88 [5/8"]	15.88 [5/8"]
9.52 [3/8"]	9.52 [3/8"]	9.52 [3/8"]	9.52 [3/8"]	9.52 [3/8"]	9.52 [3/8"]
7.5 - 45	7.5 - 45	7.5 - 45	7.5 - 50	7.5 - 50	7.5 - 50
25	25	25	30	30	30
7.5	7.5	7.5	30	30	30
30	30	30	50	50	50
16 - 43	16 - 43	16 - 43	16 - 43	16 - 43	16 - 43

Ceiling Mounted

Model No.
S-22PT1H5
S-28PT1H5
S-35PT1H5
S-45PT1H5
S-55PT1H5



TECHNICAL FOCUS

- Compact Looking, Stylish, One-Motion Design
- Energy-Saving Technology Delivering Top-Class Efficiency
- Comfortable, Long-Distance Air Flow Distribution






Selectable Remote Controller



CZ-RD513C CZ-RL013T




Capacity [Btu/h]		22,500	27,000
Power Source	V/Phase Hz	220 V, 1Ø Phase - 50 Hz	
Indoor		S-22PT1H5	S-28PT1H5
Outdoor		U-22PV1H5	U-28PV1H5
Cooling Capacity: Rated	kW	6.59	7.91
	Btu/h	22,500	27,000
Current	A	10.0	12.8
Power Input: Rated	kW	2.16	2.75
	W/W	3.05	2.88
EER		10.40	9.82
	Btu/hW		
Indoor Unit			
Air Volume	m ³ /min	17.0	18.0
Sound Pressure Level (Hi/Lo)	dB (A)	43 / 39	45 / 41
Sound Power Level (Hi/Lo)	dB	58 / 54	60 / 56
Dimension	Indoor (H×W×D)	mm	210 × 1,245 × 700
Net Weight		kg	33
Outdoor Unit			
Sound Pressure Level	dB (A)	52	56
Sound Power Level	dB	68	71
Dimension	Outdoor (H×W×D)	mm	695 × 875 × 320
Net weight		kg	55
Piping Connection	Gas Pipe	mm (inch)	15.88 (5/8")
	Liquid Pipe	mm (inch)	9.52 (3/8")
Pipe Length	Min-Max	m	7.5 - 30
Elevation Difference		m	20
Maximum Chargeless Length	Max	m	7.5
Additional Gas		g/m	25
Operating Range, Outdoor	Min-Max	°C	16 - 43

Dimensions (S-22PT1H5 / S-28PT1H5)

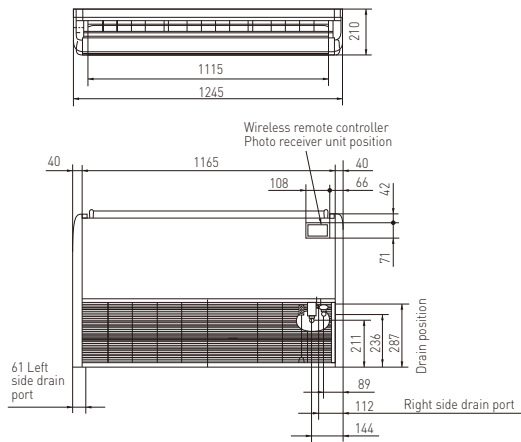

unit:mm

Dimensions (S-35PT1H5 / S-45PT1H5 / S-55PT1H5)

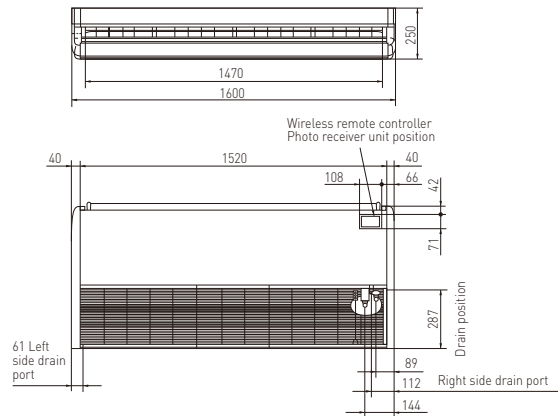


unit:mm

36,500	43,000	51,000
380 V, 3Ø phase - 50Hz		
S-35PT1H5	S-45PT1H5	S-55PT1H5
U-35PV1H8	U-45PV1H8	U-55PV1H8
10.70	12.61	14.95
36,500	43,000	51,000
6.4	7.4	9.5
3.72	4.30	5.44
2.88	2.93	2.75
9.82	9.99	9.38
29.0	31.0	32.0
47 / 43	49 / 45	50 / 46
62 / 58	64 / 60	65 / 61
250 × 1,600 × 700	250 × 1,600 × 700	250 × 1,600 × 700
43	48	48
56	56	56
70	70	70
996 × 980 × 370	996 × 980 × 370	1,170 × 900 × 320
86	86	94
15.88 (5/8")	15.88 (5/8")	15.88 (5/8")
9.52 (3/8")	9.52 (3/8")	9.52 (3/8")
7.5 - 50	7.5 - 50	7.5 - 50
30	30	30
30	30	30
50	50	50
16 - 43	16 - 43	16 - 43

Outdoor Units

4-WAY CASSETTE / CEILING MOUNTED


Dimensions (U-18PV1H5 / U-22PV1H5 / U-25PV1H5 / U-28PV1H5 / U-30PV1H5) 1-phase

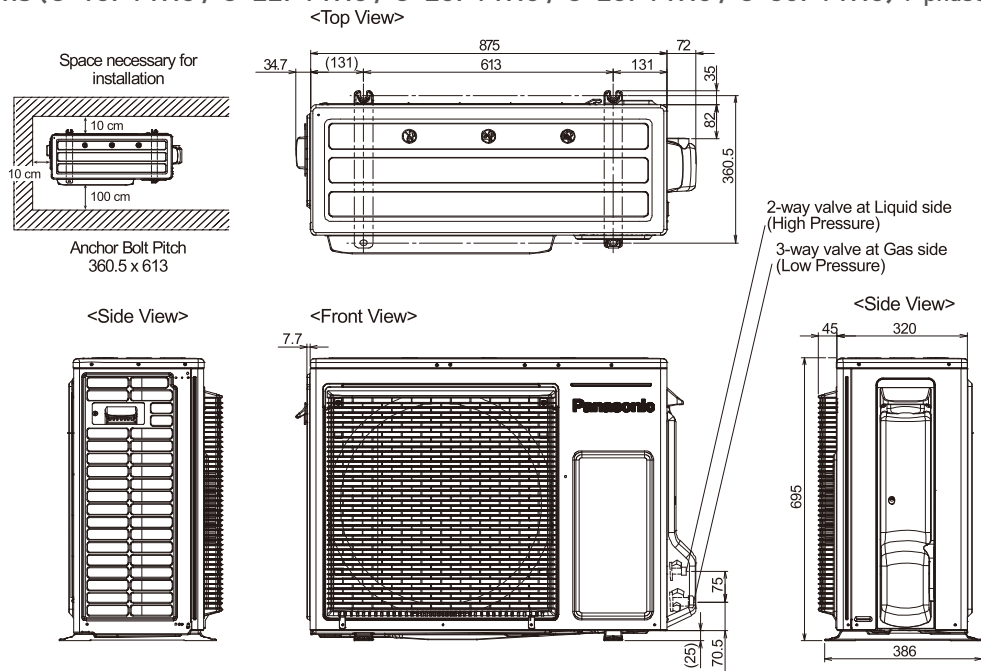

Unit:mm

4-WAY CASSETTE


Dimensions (U-30PV1H8) 3-phase

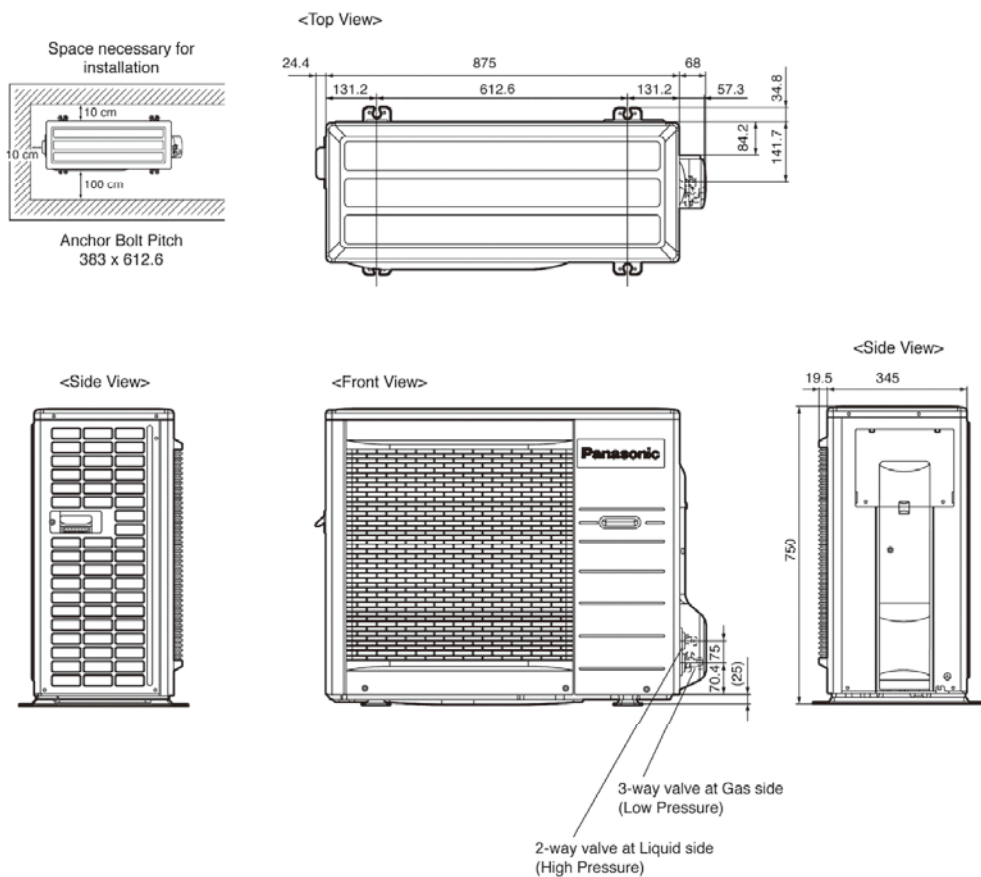

Unit:mm


4-WAY CASSETTE / CEILING MOUNTED

Dimensions (U-35PV1H8 / U-40PV1H8 / U-45PV1H8 / U-50PV1H8) 3-phase

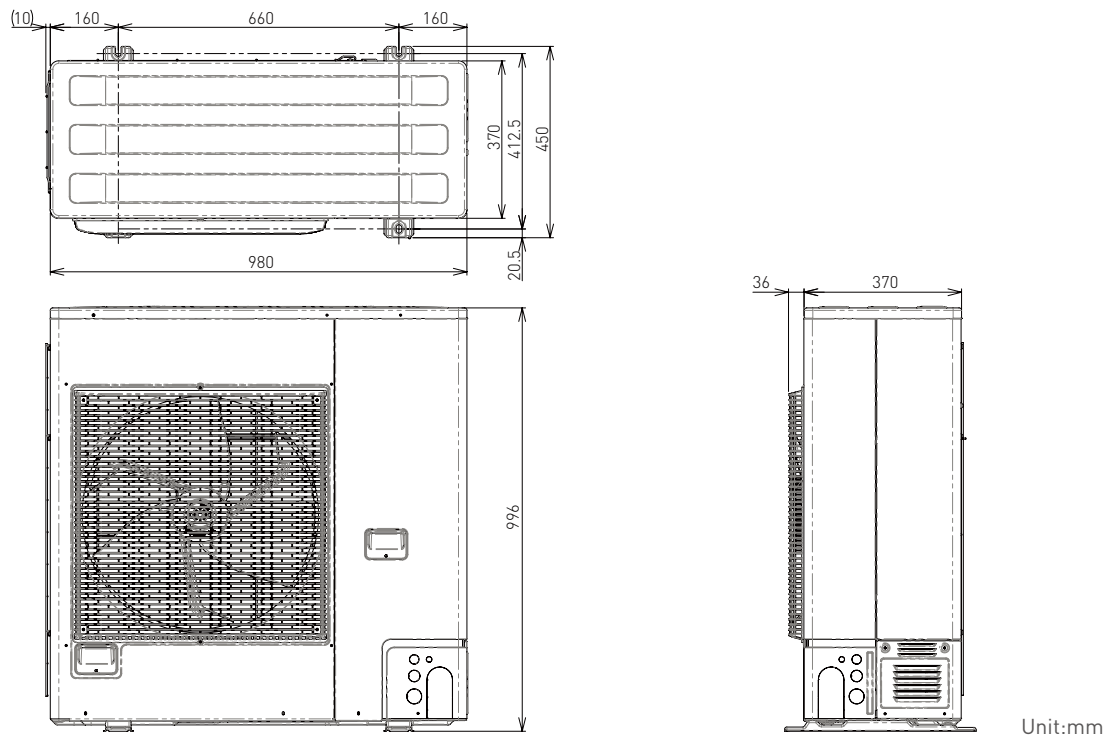

CEILING MOUNTED

Dimensions (U-55PV1H8) 3-phase

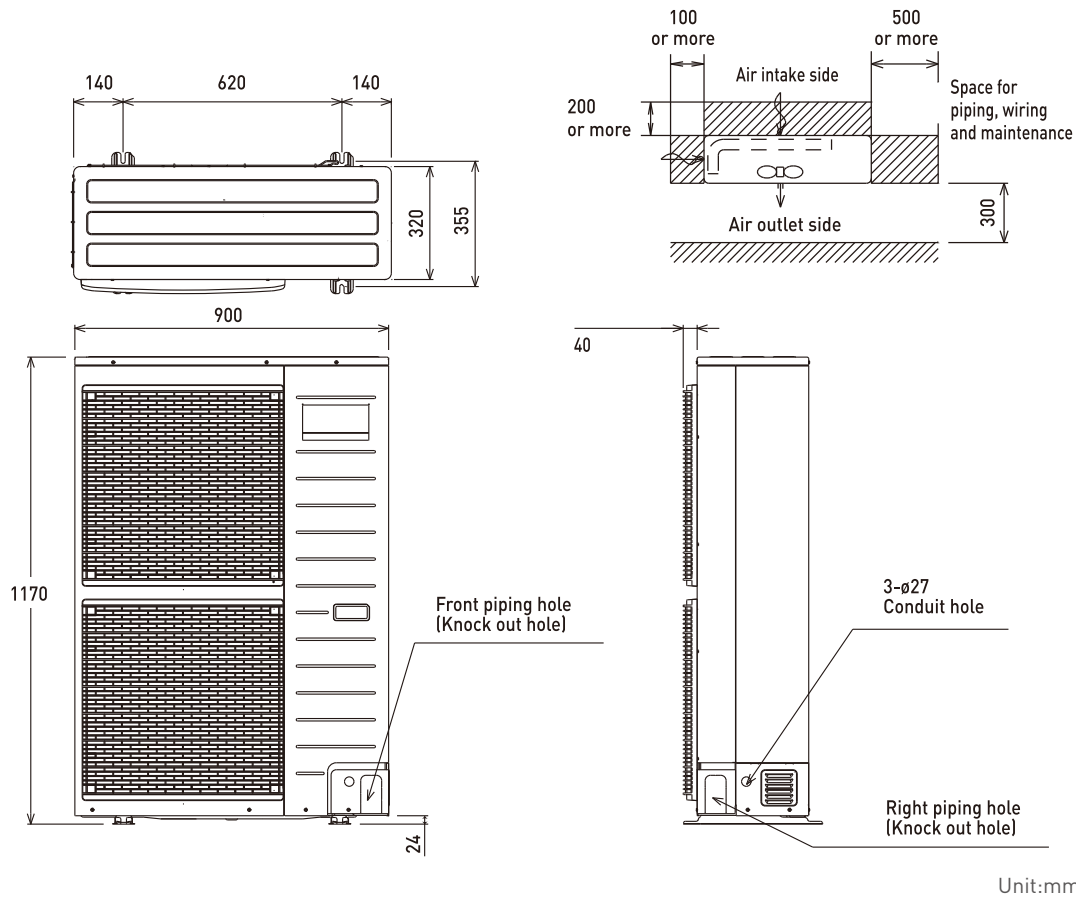

Unit:mm

Panasonic®

Building Passion, Building Solutions.

Panasonic Air Conditioning Systems

We face a time in which "quality air" differentiates business. It's a time for Panasonic to fully display its strengths. Our ability to assemble and build superior systems isn't just due to the rich resources we have as a comprehensive electronics manufacturer, but also to Panasonic's 100 years of tradition, where each person thinks and acts on their own initiative while working in a team to reach further heights. We do not compromise. Each of our independent selves is a one stop solution. We face our customers' challenges together with our customers and do all that we can to build effective systems. As a true partner for our customers, we strive to always be at the forefront of business.

- Please read the Installation Instructions carefully before installing the unit, and the Operating Instructions before using it.
- Specifications are subject to change without prior notice.
- The contents of this catalogue are accurate as of March 2023.
- Due to printing considerations, actual colours may vary slightly from those shown.
- All graphics are provided solely for the purpose of illustrating a point.



Do not add or replace refrigerant other than the specified type. Manufacturer is not responsible for damage or deterioration in safety due to usage of other refrigerant.

Authorised Dealer



此產品目錄以環保紙及墨印刷
Printed with environmental friendly ink on environmental paper

總代理 Sole Agent



SHUN HING GROUP
信興集團
SINCE 1953

信興電工工程有限公司 SHUN HING ELECTRIC WORKS AND ENGINEERING CO., LTD.

辦公室：香港九龍尖沙咀東部麼地道67號半島中心9樓
Office: 9/F, Peninsula Centre, 67 Mody Road, Tsimshatsui East, Kowloon, Hong Kong
電話 Tel: (852) 2861 2767 圖文傳真 Fax: (852) 2865 6706
網址 Website: www.shew.com.hk
電郵 E-mail: shew@shunhinggroup.com



保養及維修 Maintenance and Repair Service

信興機電工程有限公司 SHUN HING ENGINEERING CONTRACTING CO., LTD.

辦公室：香港新界葵涌葵耀街2號信興中心16樓
Office: 16th Floor, Shun Hing Centre, 2 Shing Yiu Street, Kwai Chung, N.T., H.K
電話 Tel: (852) 2419 8282 圖文傳真 Fax: (852) 2419 8234
網址 Website: www.shecon.com
技術支援 Technical Support: (852) 2116 8286